

# QUINT-BAT/24DC/12AH

Order No.: 2866365



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2866365>

Battery module, 24 V DC, 12 Ah, connection to QUINT-UPS/24DC/20, QUINT-UPS/24DC/40 and TRIO-UPS/24DC/5 via pin cable lug, 14 mm

## Commercial data

EAN	4017918959760
Pack	1 pcs.
Customs tariff	85072098
Weight/Piece	10.458 KG
Catalog page information	Page 591 (IF-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Input data

Nominal input voltage	24 V DC
-----------------------	---------

### Output data

Nominal output voltage	24 V DC
Output current	max. 50 A
Connection in parallel	Yes, for increasing the buffer period
Connection in series	No
Output fuse	2x 25 A

**General data**

Width	231 mm
Height	156 mm
Depth	110 mm
Weight	9 kg
Memory medium	battery 12 Ah
Degree of protection	IP20
Class of protection	III
Ambient temperature (operation)	0 °C ... 40 °C
Ambient temperature (storage/transport)	0 °C ... 40 °C

**Certificates / Approvals**



Certification ABS, GL

**Accessories**


Item	Designation	Description
<b>Fuse</b>		
0913757	SI FORM C 25 A DIN 72581	Fuse modular terminal block, Nominal current: 25 A, Length: 19 mm, Width: 5 mm, Height: 13 mm, Color: white

**General**

2866857	QUINT-ADAPTER/4	Assembly adapter for QUINT-BAT/24DC... on 35mm rail
---------	-----------------	---

**Diagrams/Drawings**

Block diagram

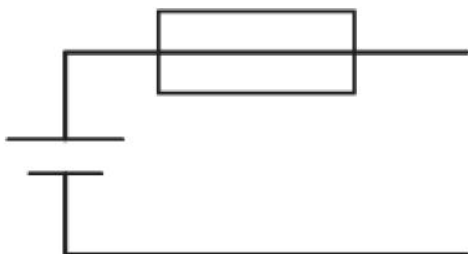

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;