

QUINT-DIODE/40

Order No.: 2938963

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2938963>

Redundancy module QUINT-DIODE/40



Commercial data	
EAN	4017918929534
Pack	1 pcs.
Customs tariff	85044081
Weight/Piece	0.682 KG
Catalog page information	Page 596 (IF-2009)

Product notesWEEE/RoHS-compliant since:
07/10/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Width	62 mm
Height	84 mm
Depth	102 mm

Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C derating, Ex -25 to +60°C)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20
Class of protection	II (in an enclosed control cabinet)
Efficiency	> 97 %
Mounting position	Horizontal and vertical DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: Horizontal 2 cm, vertical 5 cm
Electromagnetic compatibility	Conformance with EMC directive 2004/108/EC
Immunity to interference	EN 61000-6-2:2005
Emitted interference	EN 55011
Conformity with EN 50 021	EX II 3G EEx nA IIC T4, KEMA 03 ATEX 1197X

Certificates / Approvals



Certification


ABS, CUL, CUL Listed, DNV, UL, UL Listed

Certification Ex:

CUL-EX LIS, KEMA-EX, PxC-EX, UL-EX LIS

Diagrams/Drawings

Block diagram

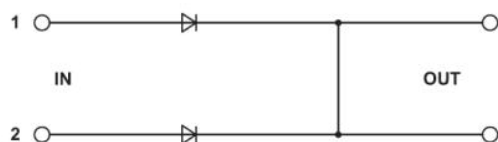

Approbationslogos (EX-Bereich)





Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;